


# AUTOLINE 5200

SPEED GATES

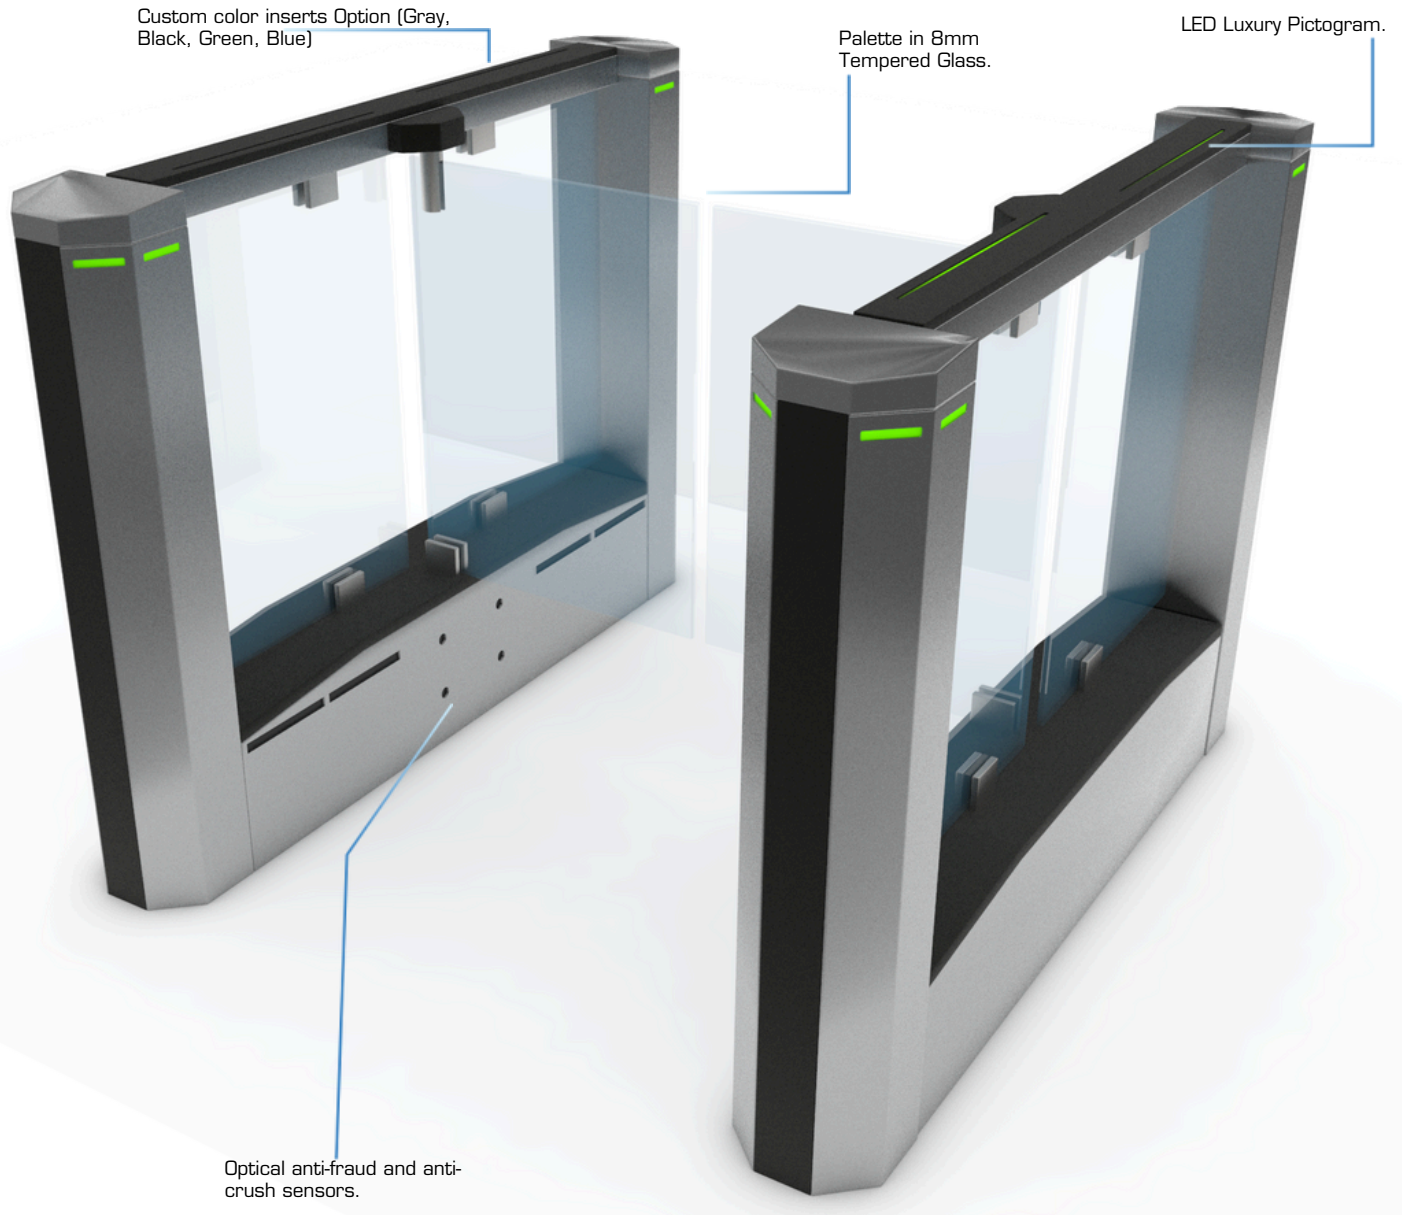

The 5200 corridor is a contactless technology featuring a motorized system that grants or denies access after validating identification, allowing passage in both directions. Its modern design makes it ideal for office spaces.

Manufactured from stainless steel, it can be customized in color and may include the following devices: embedded ID card readers, QR code readers, and Mifare card readers within the corridor cover.

## Features

## Technical Specifications

8mm Tempered Glass Door.  
Optional 10mm.

Door type: swing.

Glass height from 85 cm to 180 cm.

Bidirectional.

Anti-fraud and anti-crush system.

Infrared sensors: 6, optional 10.

High-brightness RGB LED pictogram.

Audible, visual, and remote alarms.

MCBF	12'000.000 (NO) 5'000.000 (NC)
People Passage per Minute	40 (NO) 30 (NC)
Communication	TCP/IP (Data Network)
Power Supply	110 V AC
Motor Voltage	24 V
Temperature/Humidity	0-50 °/0-90% RH
Current	4 amp
Opening/Closing Time	Configurable 15 to 5 seconds
Peak Current	10 Amp
Motor Control Interface	TTL serial RC servo pulses
Channel	Hybrid drive with encoder
Optical Sensors	12 - 24 NPN
Anchorage	Base Support 1/8"
Consumption	280 watts motor, brushless

### Packaging


Height 110 cm  
Width 25 cm  
Depth 140 cm  
Weight 70 - 100 kg

### Accessories


ID CARD READER  
QR CODE READER  
FACIAL, IRIS, AND CARD  
READER

## Anti-fraud and Anti-crush Safety Sensors

\* 6 Optical Sensors



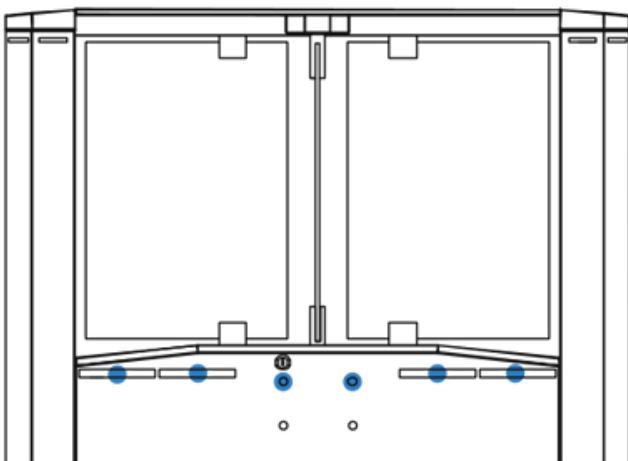


\* Optional 10 Optical Sensors

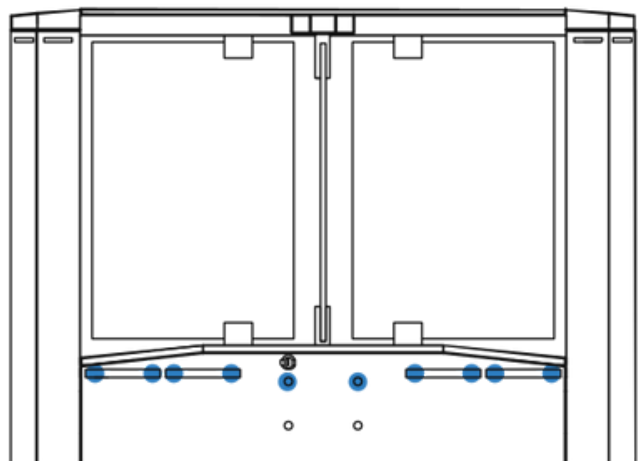

Minimal footprint, transparent body, designed for spaces that require maximum space utilization without compromising aesthetics. Various paint finish and cover options available.

Modular design allows for multiple entry points, increasing the number of columns

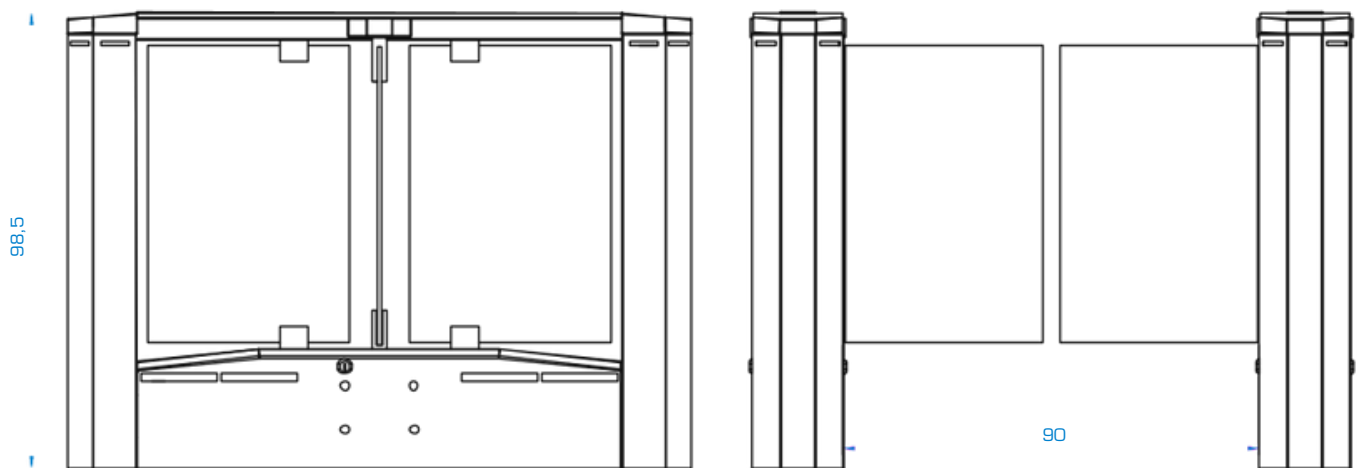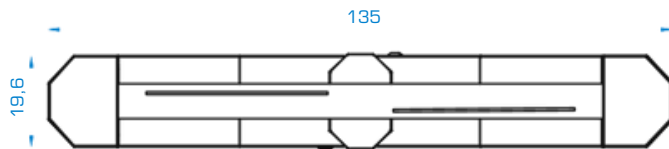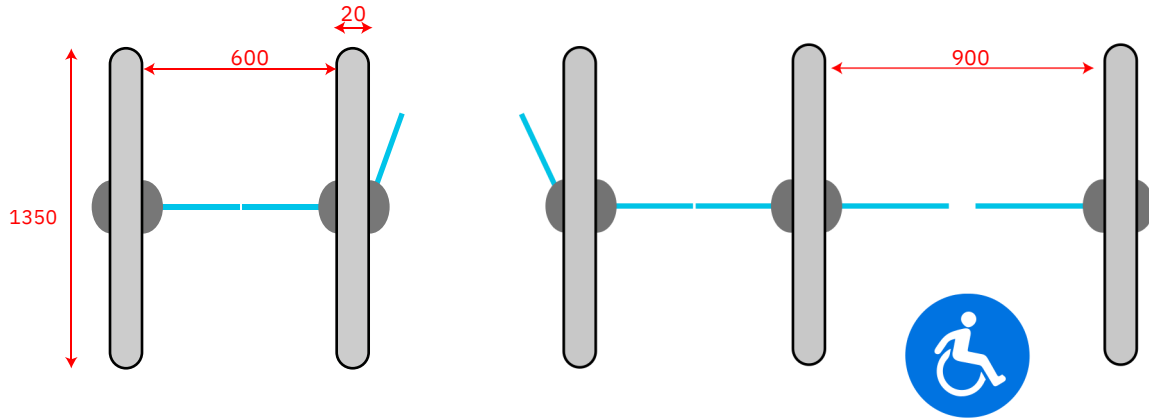

\*MEASUREMENTS IN CENTIMETERS

## ACCESS SPECIFICATIONS

People Flow According to Access Reader

Disabled Access

Emergency Exits

Insertion Card: 20 people/min  
Pass Card: 30 people/min  
Proximity Card: 40 people/min

Enabled 900 mm  
Passage Opening  
Glass

Enabled Panic  
Exit for  
Integration

## ACCESS SPECIFICATIONS

### Power Supply

110VAC  
60 Hz

### Power Rating

20VA  
STAND BY  
120VA  
IN OPERATION

### Fire Signal

INPUT FOR VOLTAGE  
FREE CONTACT  
24 VDC


### Operating Temperature

+5°C TO +40°C RH 95%  
NO CONDENSING

## DIMENSIONS AND WEIGHT

Overall Height		Passage Width	A Cabinet Height	B Cabinet Length	C Cabinet Width	Weight (kg)	
						Side Cabinet	Centre Cabinet
STANDARD	1350	600 mm	1000 mm	1260 - 1350 mm	180 mm	75 Kg	95 Kg
PMR 1350		940 mm	1000 mm	1350 mm	180 mm	80 Kg	100 Kg

## SECURITY

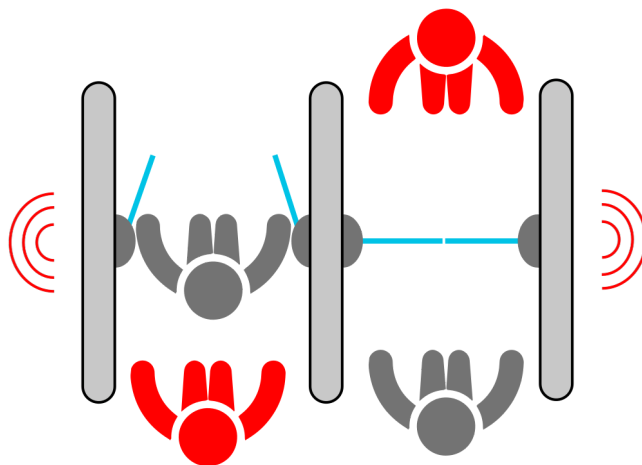

Tailgating Alert

Counterflow Alert  
Intruder Alert

### Anti-Fraud Systems

Intrusion

Counterflow

Passage Time

Anti-Climb Barriers